


STATIONARY ENGINE STARTING BATTERIES

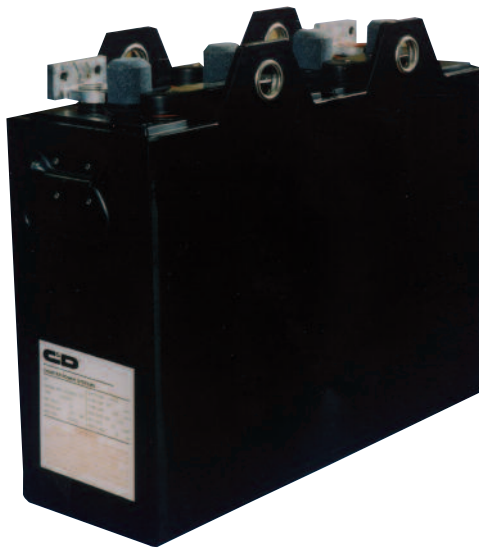

Designed specifically for starting stationary engines, C&D Technologies Stationary Engine Starting batteries have established standards for long life and reliability.

C&D positive grids are uniquely designed with more grid metal to give longer life than using conventional construction. This extra metal reduces electrical resistance and increases current carrying capacity to provide the power for tough cranking. The C&D retention system keeps active materials in the positive plates and prevents shedding, which shortens battery life.

FEATURES

- Four-cell monobloc construction with burned-on inter cell connectors for reduced resistance
- Plastic, high-density polyethylene trays for double wall strength and electrical isolation
- Optional handles or lifting eyes for ease of installation
- Available in either Lead-Calcium or Lead-Antimony alloy grids

BENEFITS

- Lower annual battery cost
- Greatly reduced maintenance
- Proven reliability
- More cranks per lifetime

Grid material	Calcium or Antimony
Grid Thickness	Calcium or Antimony
Electrolyte	1.285 @ 77°F (25°C)
Float Voltage	2.25 to 2.30 Vpc
Temperature Correction Factor	+2.8mV/degF below 77°F (25°C)
	+2.8mV/degF below 77°F (25°C)

Cell Type	Ah		CCA**	Discharge rate		Overall Dimensions			Service wt. lbs (kgs)	Electrolyte lbs (kgs)
	1.75 Vpc			1.50 Vpc	1.25 Vpc	*Length	Width	Height		
	8 Hr	1 Min		1 Min	1 Min	in (mm)	in (mm)	in (mm)		
LEAD CALCIUM-POSITIVE PLATES or LEAD ANTIMONY-POSITIVE PLATES										
4CJCS-13	280	324	420	612	972	21.00	6.88	17.12	175	44
						(534)	(175)	(435)		
4CJCS-19	420	486	630	918	1458	26.24	8.12	17.20	250	56
						(667)	(207)	(437)		

C&D TECHNOLOGIES, INC.

1400 Union Meeting Road
P.O. Box 3053 • Blue Bell, PA 19422-0858
(215) 619-2700 • Fax (215) 619-7899 • (800) 543-8630
customersvc@cdtechno.com
www.cdtechno.com

Any data, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application.