


## TITAN II 208/7200 DISTRIBUTION POWER SYSTEM

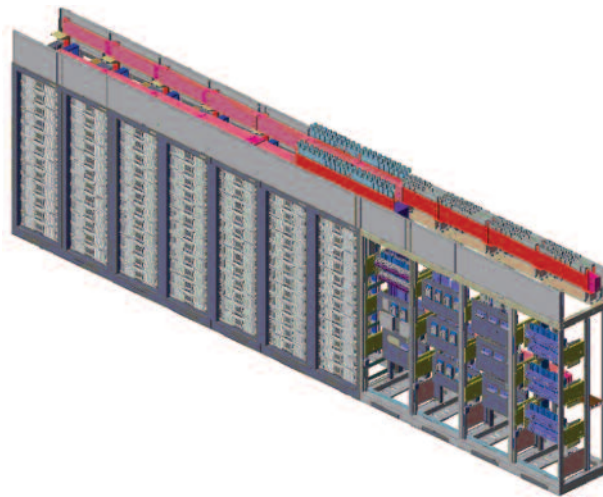

Titan II 7200 Distributed/208 Vac Power System consists of modular Titan II 7200 rectifiers, rectifier bays, a Control and Supervisory Unit (CSU), primary distribution bay and secondary distribution bays. Up to twelve Titan II 7200 rectifiers can be installed in each rectifier bay. Up to seven rectifier bays, one primary distribution bay and five secondary distribution bays can be installed in the system. The rectifiers require a nominal input of 208 or 240 Vac, 50 to 60 Hz, and provide an output of -54 Vdc nominal to power the load and maintain fully charged batteries.

The system is controlled by the Control and Supervisory Unit (CSU) mounted on the Primary Distribution Bay. Rectifier and system status, voltage and current settings and alarms are viewed at the CSU. All system parameters are set in the CSU. The CSU also has the interface for the system to the Remote Monitoring System (RMS) software package used for remote or local monitoring and control via a laptop computer or a network.

### Main Features

- Amperage up to 10,000 amps at 54 Vdc
- 3-phase rectifier, >0.99 power factor
- Individual AC input, distributed DC output

### Applications

- Telecom central offices
- Data centers
- Ferro-replacement

## Technical Specifications

### Input

AC connection	3-phase, 4-wire & Ground
Nominal voltage	208 or 240 VRMS (phase to phase)
Voltage range	176 - 264 VRMS
Frequency range	45 - 65 Hz
Current max./phase	27 ARMS/rectifier
Mains terminal	Terminal blocks (individual AC input)
Input protection	30 A breaker/rectifier

### Output

Voltage range	40 - 60 VDC; 54 VDC nom
Power, maximum	540 kW
Amperage, maximum	10,000 A
Bullet type breaker	10 - 225 A
GJ breaker	400 - 600 A
TPL breaker	300 - 800 A

### Ordering Information

Rectifier bay	Contact Representative
Primary distribution bay	162 1206 00
Secondary distribution bay	162 1207 00
Rectifier	162 1003 00

### General

Height, overall	7 ft
Width / bay	23 inch
Depth, overall	23 inch
Floor load density	122.9 lbs/ft <sup>2</sup>
Efficiency	≥ 90 %
Ambient temperature	0 - +50 °C
Relative humidity	95 % max, non cond.
EMI/RFI	FCC class B CISPR 22 class B
Protection	IP 20
Controller	Intelligent CSU

### Ordering Information

Rectifier bay	Contact Representative
GJ breaker panels	162.1305.00 (2 pos.)
	162.1306.00 (2 pos.)
	162.1307.00 (2 pos.)
	162.1311.00 (3 pos.)
	162.1312.00 (3 pos.)
TPL fuse panels	162.1313.00 (3 pos.)
	162.1302.00 (3 pos.)
	162.1303.00 (3 pos.)
	162.1304.00 (3 pos.)
	162.1308.00 (4 pos.)
	162.1309.00 (4 pos.)
	162.1310.00 (4 pos.)

## TECHNOLOGIES, INC.

1400 Union Meeting Road  
P.O. Box 3053 • Blue Bell, PA 19422-0858  
(215) 619-2700 • Fax (215) 619-7899 • (800) 543-8630  
customersvc@cdtechno.com  
www.cdtechno.com

Any data, descriptions or specifications presented herein are subject to revision by C&D Technologies, Inc. without notice. While such information is believed to be accurate as indicated herein, C&D Technologies, Inc. makes no warranty and hereby disclaims all warranties, express or implied, with regard to the accuracy or completeness of such information. Further, because the product(s) featured herein may be used under conditions beyond its control, C&D Technologies, Inc. hereby disclaims all warranties, either express or implied, concerning the fitness or suitability of such product(s) for any particular use or in any specific application or arising from any course of dealing or usage of trade. The user is solely responsible for determining the suitability of the product(s) featured herein for user's intended purpose and in user's specific application.